



HIGH FREQUENCY TRANSFORMERS (UNIVERSAL)

THE RELIABLE SOURCE/ROHS COMPLIANT

EFD-15 series (A)

UNIT:mm

Size: 18.5*16.6*8.5mm (8PIN)

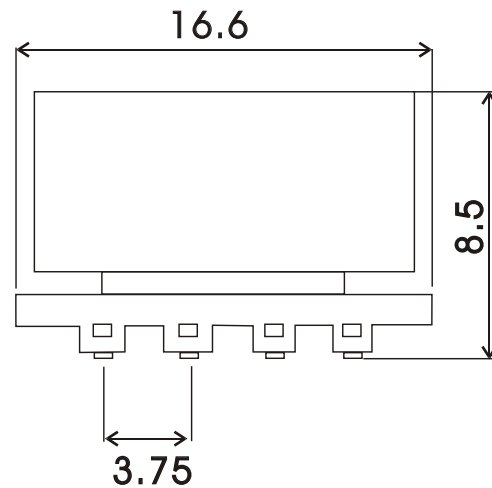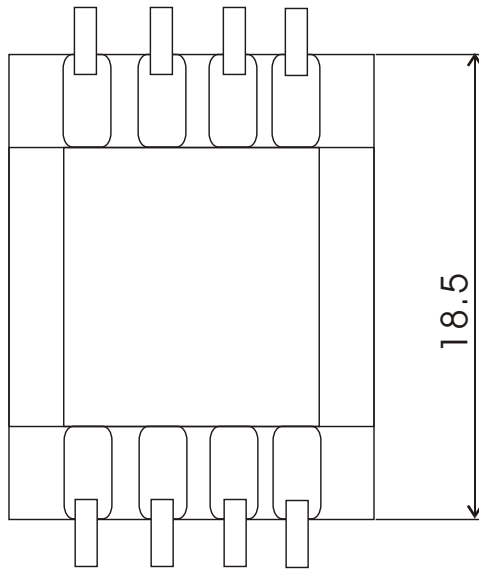

Model Available:

Model	Input	Output	DCR	Power	Weight
YN04302	INDUCTANCE 1KHZ,0.25V	1-2:55uH, 4-5:55uH 7-8:55uH, A-B:830uH	1-2:1.5Ω, 4-5:1.35Ω 7-8:1.55Ω, A-B:1.25Ω	1W	
YN04303	INDUCTANCE 1KHZ,0.25V	1-2: 965uH, 4-5:1.35mH 7-8: 1.35mH, A-B:500uH C-D:4.5uH	1-2: 3.45Ω, 4-5:7.6Ω 7-8: 7.3Ω, A-B:1.0Ω C-D:150mΩ	1W	
YN08003	INDUCTANCE 1KHZ,0.25V	1-3: 780uH, 1-4: 3.2mH 5-6: 135mH	1-3: 1.58Ω, 1-4:2.9Ω 5-6: 166Ω	1W	
YN10054	INDUCTANCE 1KHZ,0.25V	1-2: 965uH, 4-5:1.35mH 7-8: 47.5uH, A-B:500uH C-D:4.5uH	1-2: 3.45Ω, 4-5:7.6Ω 7-8: 284mΩ, A-B:1.0Ω C-D:150mΩ	1W	
Other	Available incustom-made models and specification.				

※ RoHS/UL recognized components.




HIGH FREQUENCY TRANSFORMERS (UNIVERSAL)

THE RELIABLE SOURCE/ROHS COMPLIANT

EFD-15 series (B)

UNIT:mm

Size: 18.5*16.6*8.5mm (8PIN)

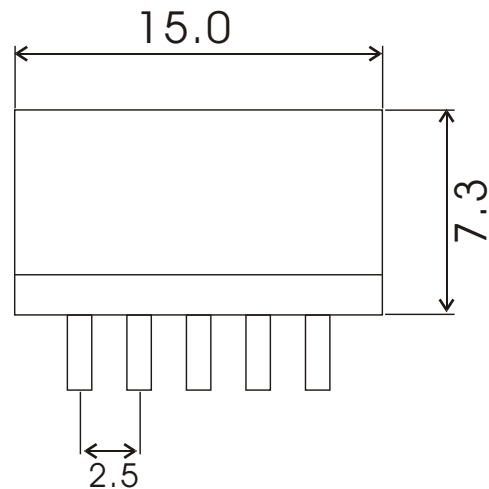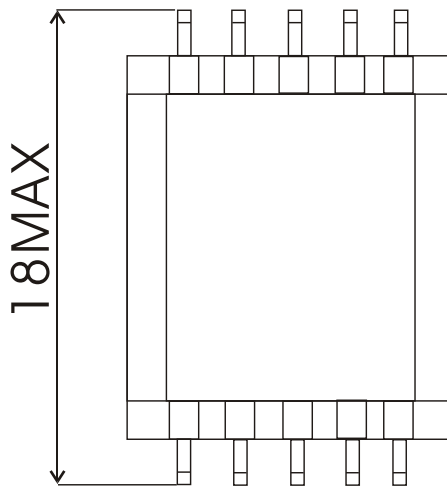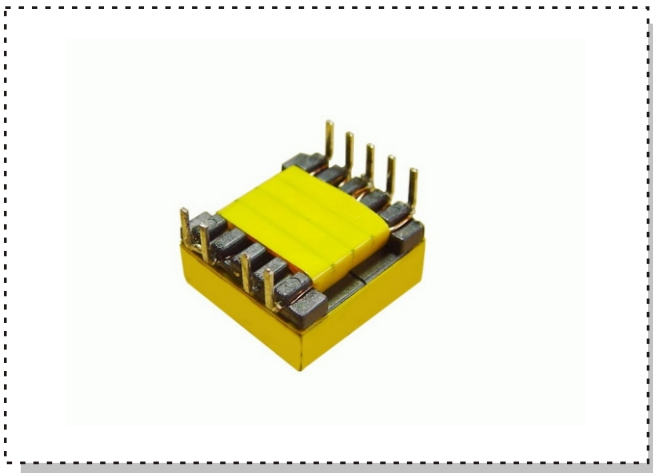

Model Available:

Model	Input	Output	DCR	Power	Weight
YN2K193-1	INDUCTANCE 1KHZ,0.25V	1-5:145mH, 7-9:65uH 6-10:2.1uH	1-5: 140Ω, 7-9: 0.17Ω 6-10: 0.04Ω	1W	
YN01001-2	INDUCTANCE 1KHZ,0.25V	1-5:355.0mH, 7-9:100.0uH 6-10:1.8uH	1-5: 310Ω, 7-9: 205.0Ω 6-10: 32.5Ω	1W	
YN01363	INDUCTANCE 1KHZ,0.25V	2-5:340.0mH, 6-10:1.0uH 7-9:130uH	2-5: 316.5Ω, 6-10: 31.5mΩ 7-9: 334.5mΩ	1W	
YN04280	INDUCTANCE 1KHZ,0.25V	2-4:57.0uH, 1-5: 3.8uH 6-10:297mH	2-4: 110mΩ, 1-5: 88mΩ 6-10: 276Ω	1W	
YN03324	INDUCTANCE 1KHZ,0.25V	6-10:980mH, 1-2: 2.0uH(REF) 3-5:290uH	6-10: 810Ω, 1-2: 45mΩ 3-5: 445mΩ	1W	
YN04285	INDUCTANCE 1KHZ,0.25V	1-5:0.7~1.5H 6-10:203.0mH	1-5: 22.0Ω 6-10: 13.3Ω	1W	
Other	Available incustom-made models and specification.				

※ RoHS/UL recognized components.